







With the cam-locks in the panels, it is easy for the installation. This kind applies to small cold storage.



Fast-Fit




Fastener

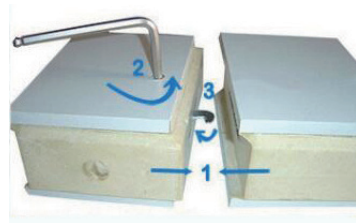


Fit together

Cam-lock Type PU Sandwich Panel	Specifications
Core material	PU(Polyurethane)
Panel connection	Cam-lock type, using hexagonal key to assemble and disassemble
Density	$40 \pm 2 \text{ Kg/m}^3$ OR $42 \pm 2 \text{ Kg/m}^3$
Thermal conductivity	0.022 W/m·K
Fireproofing grade	B2 class
Thickness	100mm, 150mm, 200mm
Length	8000mm max
Standard width	960mm OR 1183mm
Steel cover	Stainless steel plate, color steel plate, embossed aluminum plate, the two sides can be different.
Color steel plate thickness	0.4mm, 0.5mm
304 Stainless steel plate thickness	0.4mm, 0.5mm, 0.6mm, 0.7mm, 0.8mm
Embossed aluminum plate thickness	0.6mm

Thermal Conductivity

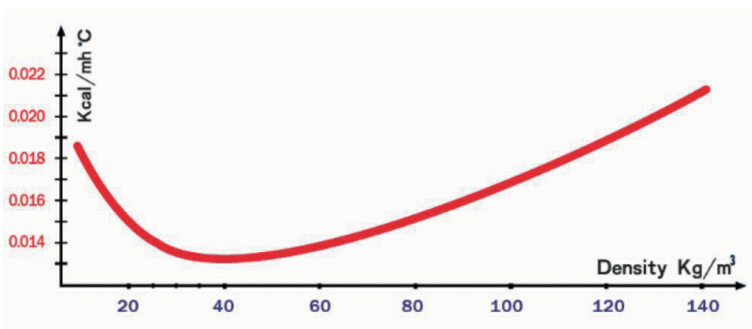

Density & Thermal Conductivity

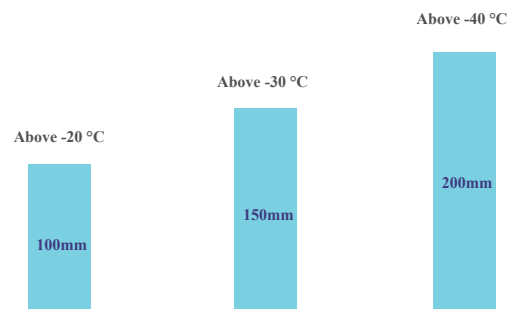

Thickness & Room Temperature